

W1000S 1000FT WIRELESS VIDEO TRANSMISSION SYSTEM

Real-time Intercom | Stable Transmission | Fast Live Streaming

- 

1000ft 0.08S
Ultra-low Latency
- 

SDI +
Dual HDMI
- 

Full Duplex
Intercom
- 

Direct Video for
Live Stream
- 

1080P
HD
HD
1080P/60Hz
- 

One TX to
Multiple RX
- 

OLED
Screen
- 

13 Frequency
Channels
- 

Android/
iOS APP

>> KEY FEATURES

- Dual HDMI + SDI signal interfaces, meet your different needs
- More than 1000ft transmission range with 0.08S ultra-low latency
- Up to 1080P@60Hz, provide high quality image
- Wireless full-duplex talkback, real-time intercom between the director and the photographer
- The transmitter can be switched as a receiver at will
- One TX to multiple RX, monitoring for everyone on set
- Real-time APP monitoring for Android/iOS system
- 13 frequency channels, AUTO channel scan
- With type-C to Ethernet adapter accessory, achieve live streaming

>> MULTIPLE POWER OPTIONS



>> OLED SCREEN



F970 Battery


TYPE-C Charging

DC Power


>> PARAMETER

	Transmitter	Receiver
Screen	OLED	OLED
Interface	1 * SDI input	2* HDMI output
	1 * HDMI input, 1* HDMI output	1* SDI output
	2 *Antenna port (RP-SMA Male)	2 *Antenna port (RP-SMA Male)
	DC power input	DC power input
	3.5mm headphone jack	3.5mm headphone jack
	Type-C	Type-C
Power Supply Way/ Power Voltage	F970 battery	F970 battery
	Type-C: 5V/1.5A	Type-C: 5V/1.5A
	DC adapter: 6-16V	DC adapter: 6-16V
Power Consumption	<7.5W	<6.5W
HDMI Input/Output Video Format	480P60, 576P60	480P60, 576P60
	720P60/59.94/50	720P60/59.94/50
	1080P60/59.94/50/30/29.97/25/24/23.98	1080P60/59.94/50/30/29.97/25/24/23.98
	1080I60/59.94/50	1080I60/59.94/50
	HDMI Type A	HDMI Type A
SDI Input/Output Video Format	480P60, 576P60	480P60, 576P60
	720P60/59.94/50	720P60/59.94/50
	1080P60/59.94/50/30/29.97/25/24/23.98	1080P60/59.94/50/30/29.97/25/24/23.98
	1080I60/59.94/50	1080I60/59.94/50
	1*BNC	1*BNC
Frequency	5.1-5.9GHz	5.1-5.9GHz
Modulation Mode	OFDM	OFDM
Transmission Power	Maximum 17dBm	/
Receiving Sensitivity	/	-87dBm
Band Width	20MHZ	20MHZ
Latency	Min 0.08S	Min 0.08S
Intercom Frequency Response Range	20Hz~20KHz	20Hz~20KHz
Operating Temperature	0°C ~ 40°C	0°C ~ 40°C
Storage Temperature	-20°C ~ 60°C	-20°C ~ 60°C
Unit Size(mm)	67L*24W*118H (excluding antenna)	67L*24W*118H (excluding antenna)
Unit Weight	128g	128g

>> PACKING LIST

					
Transmitter	Receiver	Antenna	Cold Shoe	Type-C to USB	User manual

Transmitter

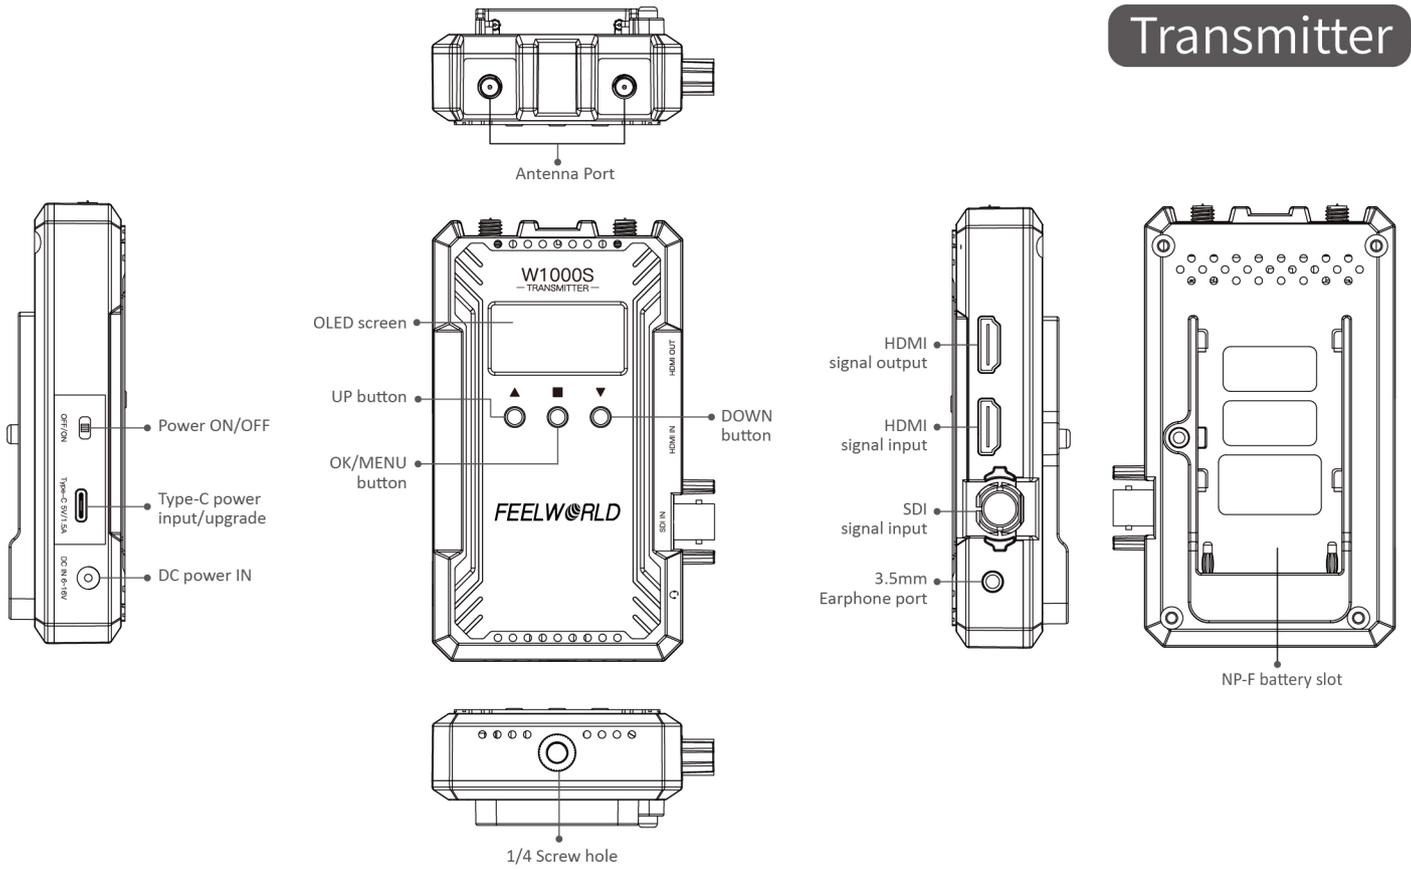

Receiver

