



Portable DAC

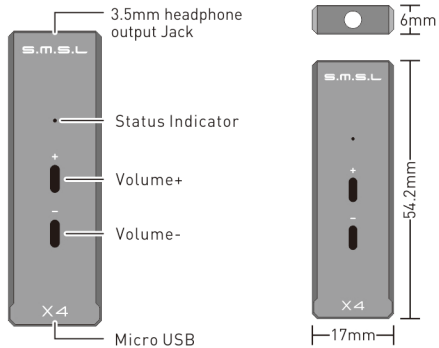

Cable Connection

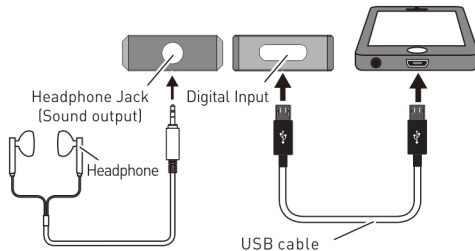

Features

- 1 Using Texas Instruments's TAS1020B, streaming the digital audio up to 24bit/96kHz.
- 2 Wolfson's high fidelity DAC WM8524G with build-in low pass filter.
- 3 Using ultra-low noise power supply LDO.
- 4 Independent headphone amplifier with build-in volume control for best sounding procedure.

- 5 Ultra-low power consumption design supports OTG for most of mobile phones.

Specification

Dynamic range:	103dB
Distortion:	0.008%
SNR:	96dB
Sampling Frequency:	44.1kHz, 48kHz, 88.2kHz, 96kHz
Power consumption:	0.5W
Output power:	32 Ω : 80mW(THD=0.1%) 64 Ω : 48mW(THD=0.1%)
Impedance range:	16-300 Ω

Shenzhen Shuangmusanlin Electronics Co., Ltd.

Address: 8th Floor B6 Building JunFeng Industrial Park,
Fuyong town, BaoAn District Shenzhen, China

Tel: +86-755-27444178

<http://www.smsl-audio.com/>